


# BÄRO AIRCOM O2

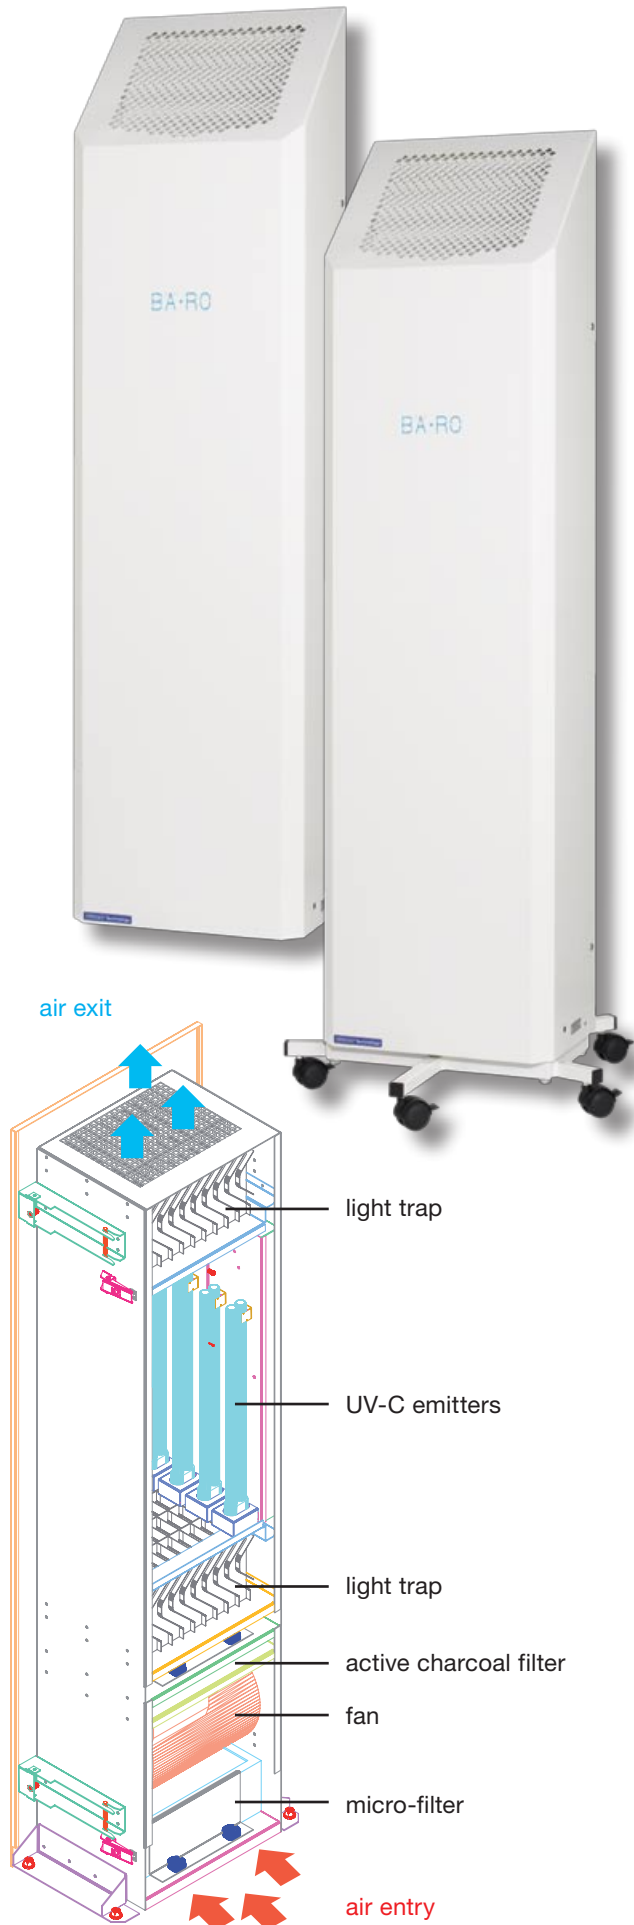

Technical description	AirCom O2
Product no.	895495
Height (stand-alone unit with castors)	1,640 mm (1,730 mm)
Width (stand-alone unit with castors)	430 mm (580 mm)
Depth (stand-alone unit with castors)	265 mm (570 mm)
Supply voltage	230 V ~ 50 Hz
Power consumption	530 Watt
1st filter stage	F 9 micro-filter
2nd filter stage	active charcoal filter
Air flow rate – noise development	
stage 1	130 m <sup>3</sup> /h – 40 dB (A)
stage 2	190 m <sup>3</sup> /h – 41 dB (A)
stage 3	220 m <sup>3</sup> /h – 46 dB (A)
UV-C emitters	4 x 95 Watt
Emitter service life	8,000 h
Safety class	I
Protection class	IP 20
Radiation chamber material	aluminium
Housing material	sheet steel, powder-coated RAL 9010
Weight (with castors)	45 kg (48 kg)

**BÄRO**  
Air hygiene

Wolfstall 54–56 · 42799 Leichlingen  
 Phone + 49 2174 - 799-505  
 Fax + 49 2174 - 799 799  
 baero-technology@baero.com  
 www.baero.com